

Ditetra İnovasyon Anonim Şirketi



+90 (332) 342 76 76
info@ditetra.com

renled.com

Fevzi Çakmak mah. Ayyıldız cad. no:48E
Karatay/KONYA Karatay / Konya / Türkiye

Gründungsjahr
2024

Anzahl der
Mitarbeiter

10-25 Offene Fläche
in m2

Über uns

Renled vereint Kreativität, Qualität und Technologie in seinen Beleuchtungslösungen. Vom Garten- und Innenbereich über Straßenbeleuchtung bis hin zu maßgeschneiderten Konzeptprojekten bietet Renled seinen Kunden elegante und effiziente Lösungen.

Qualität: Produkte, die kontinuierlich nach europäischen Standards verbessert werden.

Technologie: Moderne und effiziente Lösungen durch aktuelle Technologien.

Maßgeschneiderte Projekte: Ästhetische und funktionale Produkte, die auf Kundenwünsche zugeschnitten sind.

Einfache Anwendung: Praktische und benutzerfreundliche Produkte für Installation und Nutzung.

Firma Verantwortliche



Fatih Serhat ÇAÇIK
Inhaber der Firma

info@ditetra.com
332 (34) 2 7 6 76

Qualitätszertifikate



ISO 9001:2008 Qualitätsmanagementsystem



ISO 14001 Umweltmanagementsystem



OHSAS 18001:2007 Arbeitsschutzmanagementsystem

Produkte

Marken

renled

Länder, in die wir exportieren



Kazakhstan, Usbekistan, Azerbaycan

Länder, aus denen wir importieren

China, Deutschland

Produkte, die wir importieren

çelik

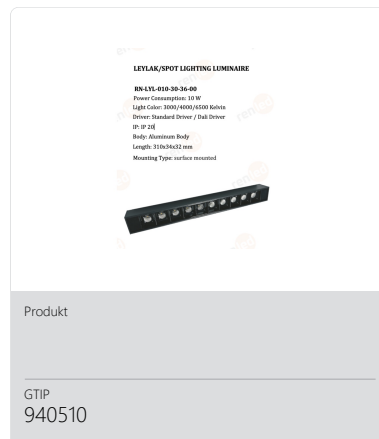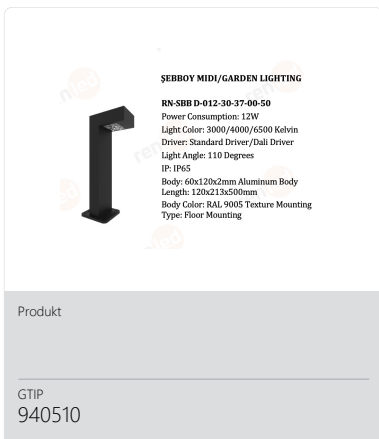

Ditetra İnovasyon Anonim Şirketi



+90 (332) 342 76 76

info@ditetra.com

renled.com


Fevzi Çakmak mah. Ayyıldız cad. no:48E
Karatay/KONYA Karatay / Konya / Türkiye

Gründungsjahr
2024

Anzahl der
Mitarbeiter

10-25 Offene Fläche
in m2

Produkte



BAMBU UFO/LIGHTING POLE
RN-BMB-UFO-500-30-00-00-00
Power Consumption: 60 W
Light Color: 3000 / 4000 / 6500 Kelvin
Driver: Standard Driver / Dali Driver
IP: IP65
Body: 60x120x2mm Aluminum Body
Length: 300 cm
Body Color: RAL 9005 Texture
Mounting Type: Floor Mounting

Produkt

GTIP
940510



BAMBU P / LIGHTING POLE
RN-BMB-P-600-30-00-00-00
Power Consumption: 30 W
Light Color: 3000 / 4000 / 6500 Kelvin
Driver: Standard Driver / Dali Driver
IP: IP65
Body: 60x120x2mm Aluminum Body
Length: 300 cm
Body Color: RAL 9005 Texture
Mounting Type: Floor Mounting

Produkt

GTIP
940510



SEXYTA / GARDEN LIGHTING
RN-SBY-615-27-37-00
Power Consumption: 15W
Light Color: 2700/3000/4000/6500 Kelvin
Driver: Standard Driver/Dali Driver
Light Angle: 37 Degrees
IP: IP65
Body: 100x100x2mm Aluminum Body
Length: 100x100x100mm
Body Color: RAL 9005 Texture
Type: Floor Mounting

Produkt

GTIP
940510



BAMBU R/LIGHTING POLE
RN-BMB-R-600-30-00-00-00
Power Consumption: 30 W
Light Color: 3000 / 4000 / 6500 Kelvin
Driver: Standard Driver / Dali Driver
IP: IP65
Body: 60x120x2mm Aluminum Body
Length: 300 cm
Body Color: RAL 9005 Texture
Mounting Type: Floor Mounting

Produkt

GTIP
940510



ŞEBBOY 7 / GARDEN LIGHTING
RN-SBB-7-012-30-37-00-00
Power Consumption: 12W
Light Color: 3000/4000/6500 Kelvin
Driver: Standard Driver/Dali Driver
Light Angle: 110 Degrees
IP: IP65
Body: 100x100x2mm Aluminum Body
Length: 62,5x24 cm
Body Color: RAL 9005 Texture
Type: Floor Mounting

Produkt

GTIP
940510



BAMBU / LIGHTING POLE
RN-BMB-636-30-37-00-00
Power Consumption: 3x12 W
Light Color: 3000/4000/6500 Kelvin
Driver: Standard Driver / Dali Driver
IP: IP65
Body: 60x120x2mm Aluminum Body
Length: 300 cm
Body Color: RAL 9005 Texture
Mounting Type: Ground Mounted

Produkt

GTIP
940510



CANNA HEDGE / LINDER DECORATIVE LUMINAIRE
RN-CNH-H-60-60-30-00-00
Power Consumption: 60/100/150 W
Light Color: 3000/4000/6500 Kelvin
Driver: Standard Driver / Dali Driver
Body: Aluminum Body
Length: 60x60x60 mm
Body Color: RAL 9005 Texture
Mounting Type: Pole Mounting

Produkt

GTIP
940510



BEGONYA MINI/GARDEN LIGHTING
RN-BGN-M-012-30-37-00-30
Power Consumption: 12W
Light Color: 3000/4000/6500 Kelvin
Driver: Standard Driver/Dali Driver
Light Angle: 110 Degrees
IP: IP65
Body: 100x100x2mm Aluminum Body
Length: 100x100x100mm
Body Color: RAL 9005 Texture
Type: Floor Mounting

Produkt

GTIP
940510



BEGONYA MAXI/GARDEN LIGHTING
RN-BGN-X-024-30-37-00-80
Power Consumption: 12W
Light Color: 3000/4000/6500 Kelvin
Driver: Standard Driver/Dali Driver
Light Angle: 110 Degrees
IP: IP65
Body: 100x100x2mm Aluminum Body
Length: 100x100x80mm
Body Color: RAL 9005 Texture
Type: Floor Mounting

Produkt

GTIP
940510